

## Dual-Tech Presence Detectors with Zūm® Wired Lighting Control



- *Ceiling-mount presence sensor*
- *Dual-technology (passive infrared and ultrasonic) motion detection*
- *360 degree coverage pattern*
- *Fully digital circuitry for low cost and high reliability*
- *Built-in closed loop daylight sensor*
- *Control system communications the Zūm® Link network*
- *Compatible with Zūm wired keypad*
- *For the -RLY model, additional relays included for input-relay capable devices*

As part of providing professional lighting and control solutions for the entire enterprise, we are pleased to offer STEINEL™ products, which are available for sale through authorized Crestron® Commercial Lighting system integrators.

Based in Germany, STEINEL has been manufacturing lighting controls for over 25 years. Their product offering includes a wide variety of controls and sensors for indoor and outdoor applications.

STEINEL™ presence detectors with Zūm® Link wired communication are part of a system designed to provide sophisticated lighting control with simple installation. A wired solution for Zūm commercial lighting systems, the Zūm Link Presence Detectors communicate via [CBL-CAT5E-ZUMLINK-P](#) cable (sold separately) which allow for in-room device daisy-chaining to other Zūm Link devices (such as the [ZUMLINK-KP](#) keypad or Zūm Link [load controllers](#)). The presence detectors are equipped with daylighting capabilities to adjust the lighting based on natural light. The RLY presence detectors also have a three-wire output relay to connect to a relay-input capable device, such as an HVAC call system. The presence detectors mount directly to the ceiling or via a junction box (not included).

Twelve Zūm Link Presence Detectors are offered:

### Presence Detector with Daylight Sensing

- [ZUMLINK-IR-QUATTRO-DLS](#) with passive infrared technology
- [ZUMLINK-DT-QUATTRO-DLS](#) with passive infrared and ultrasonic technology
- [ZUMLINK-US-QUATTRO-DLS](#) with ultrasonic technology
- [ZUMLINK-IR-QUATTRO-HD-DLS](#) with high-definition, passive infrared technology
- [ZUMLINK-US-HALLWAY-DLS](#) with ultrasonic technology and bidirectional detection for hallways
- [ZUMLINK-US-ONEWAY-DLS](#) with ultrasonic technology and unidirectional detection for hallways

### Presence Detector with Daylight Sensing and Output Relay

- [ZUMLINK-IR-QUATTRO-DLS-RLY](#) with passive infrared technology
- [ZUMLINK-DT-QUATTRO-DLS-RLY](#) with passive infrared and ultrasonic technology
- [ZUMLINK-US-QUATTRO-DLS-RLY](#) with ultrasonic technology
- [ZUMLINK-IR-QUATTRO-HD-DLS-RLY](#) with high-definition, passive infrared technology
- [ZUMLINK-US-HALLWAY-DLS-RLY](#) with ultrasonic technology and bidirectional detection for hallways
- [ZUMLINK-US-ONEWAY-DLS-RLY](#) with ultrasonic technology and unidirectional detection for hallways

### Zūm Link Wired Technology

Zūm Link technology enables in-room lighting control through keypads and sensors wired to controllers. Zūm Wired devices connect via [CBL-CAT5E-ZUMLINK-P](#) CAT5e cable (sold separately) to provide daisy-chaining and lighting control of compatible loads.

# Dual-Tech Presence Detectors with Zūm® Wired Lighting Control

## Easy Installation

For flexibility and ease-of-use, install Zūm devices (load controllers, keypads, and presence detectors) and connect them with Zūm Link ([CBL-CAT5E-ZUMLINK-P](#)) or Zūm Net ([CBL-CAT5E-ZUMNET-P](#)) CAT5e cable. Nonsystem occupancy, vacancy, or daylight sensors may also be installed in a Zūm space wired to the a load controller.

## Easy Commissioning

Finish the installation by quickly commissioning the room through the [Zūm app](#). Expedite commissioning by copying a room configuration and sending it to an identical room. Save a room configuration template and share it via the [ZUM-HUB4](#) or the Zūm app. The [ZUMLINK-KP](#) Bluetooth® connection is required to configure a Zūm wired space with the Zūm app.

## Specifications

### Load Control

Control	1A @ 30VAC/VDC
Output	

### Zūm Link Power Bus Requirements

Max Current	28 mA
Consumption	

### Dual Technology Detection

Sensing	Passive Infrared (PIR) and Ultrasonic (40 kHz) detection
Coverage	360°
Sensors	Single infrared pyroelectric detector
Detection Zones	<b>Presence:</b> Major motion as described by NEMA WD7; PIR: Maximum: 50 x 40 ft (2,000 sq ft)/ 15 x 12 m (180 sq m); US: Maximum: 40 x 30 fct (1,200 sq ft)/ 12 x 9 m (108 sq m)
Light Level Setting	10-1000lux / 1-100 fc

### Controls & Indicators

LED	(3) Blue LEDs on the sensor head frontplate  Flashes upon start up and when triggered to identify itself
-----	--

### Connections

ZUMLINK	(2) RJ-45 orange ports; In-room Zūm Link device daisy-chaining; Maximum 750mA pass-through current including any internal power supply
Output Relays	(1) Green: Normally open
(Relay models only)	(1) Blue: Normally closed (1) Red: Common

### Environmental

Temperature	32° to 104°F (0° to 40°C)
Rating	IP20 rated

### Enclosure

Material	Plastic
----------	---------

# Dual-Tech Presence Detectors with Zūm® Wired Lighting Control

**Mounting** Mount directly in the ceiling, 4 in. square or round junction boxes (not included), or 3 in. mud rings (not included)

Specifications are subject to change without notice.

©2024 Crestron Electronics, Inc.

Rev 12/02/24

## Dimensions

<b>Height</b>	4.73 in. (121 mm)
<b>Width</b>	4.73 in. (121 mm)
<b>Depth</b>	2.63 in. (67 mm)

## Compliance

**Regulatory Mode: M202111002**

UL® Listed

## Models

### ZUMLINK-DT-QUATTRO-DLS

Dual-Tech Presence Detector with Daylight Sensing and Link Communication for Zūm® Wired Lighting Control

### ZUMLINK-DT-QUATTRO-DLS-RLY

Dual-Tech Presence Detector with Daylight Sensing, HVAC Control, and Link Communication for Zūm® Wired Lighting Control

## Available Accessories

For a list of available accessories, visit [ZUMLINK-DT-QUATTRO-DLS](#) and [ZUMLINK-DT-QUATTRO-DLS-RLY](#) product pages.

The original language version of this document is U.S. English. All other languages are a translation of the original document.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/How-To-Buy/Find-a-Representative](http://www.crestron.com/How-To-Buy/Find-a-Representative) or contact us for additional information by visiting [www.crestron.com/contact/our-locations](http://www.crestron.com/contact/our-locations) for your local contact.


The product warranty can be found at [www.crestron.com/warranty](http://www.crestron.com/warranty).

The specific patents that cover Crestron products are listed online at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron, the Crestron logo, and Zūm are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Bluetooth is either a trademark or registered trademark of Bluetooth SIG, Inc. in the United States and/or other countries. STEINEL is either a trademark or registered trademark of Steinel Vertrieb GmbH in the United States and/or other countries. UL is either a trademark or registered trademark of UL LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

## Dual-Tech Presence Detectors with Zūm® Wired Lighting Control

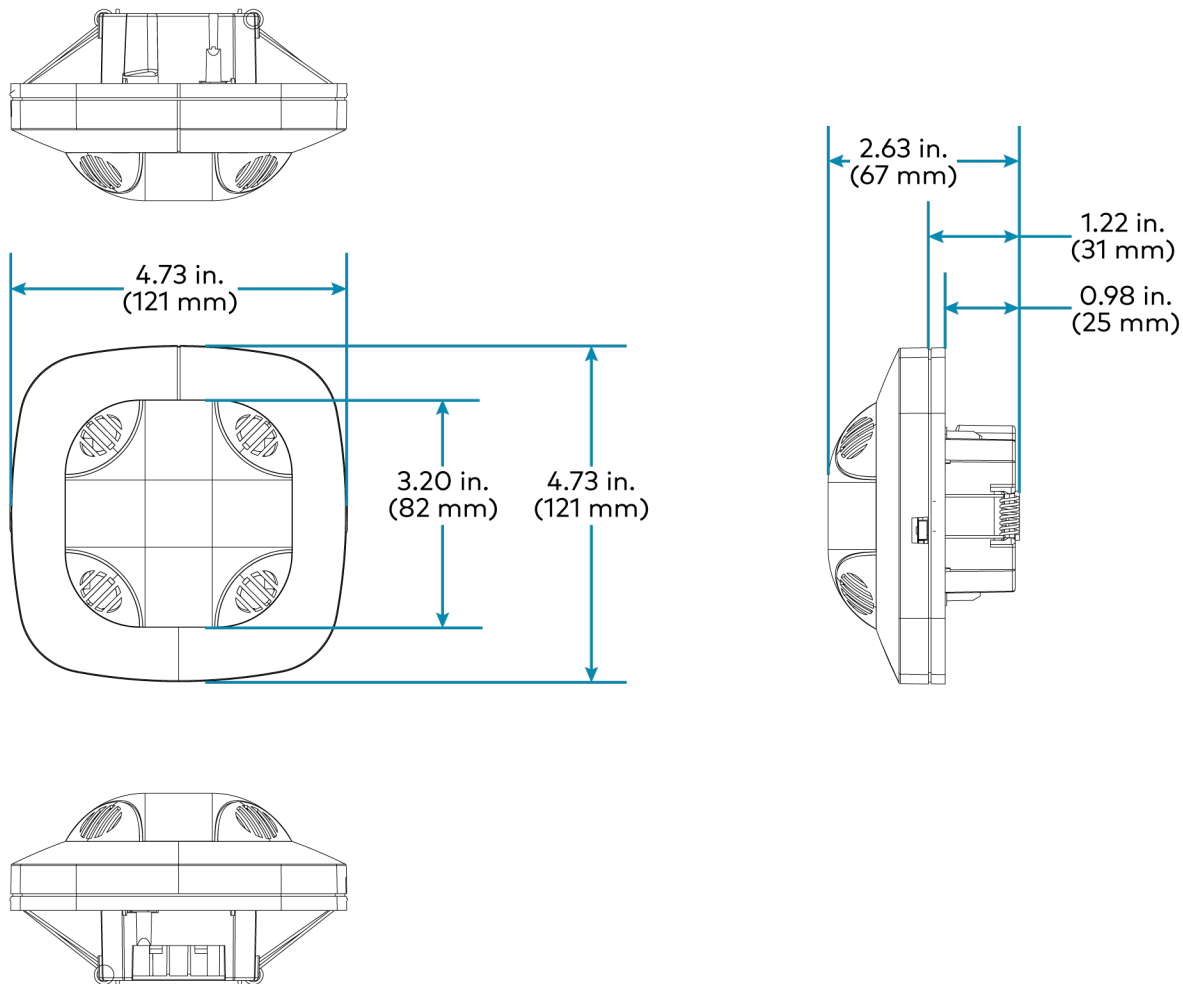


## Dual-Tech Presence Detectors with Zūm® Wired Lighting Control


### Beam Pattern Coverage

**NOTE:** Detection along the far edge of the detection range may be inconsistent.

#### Top View

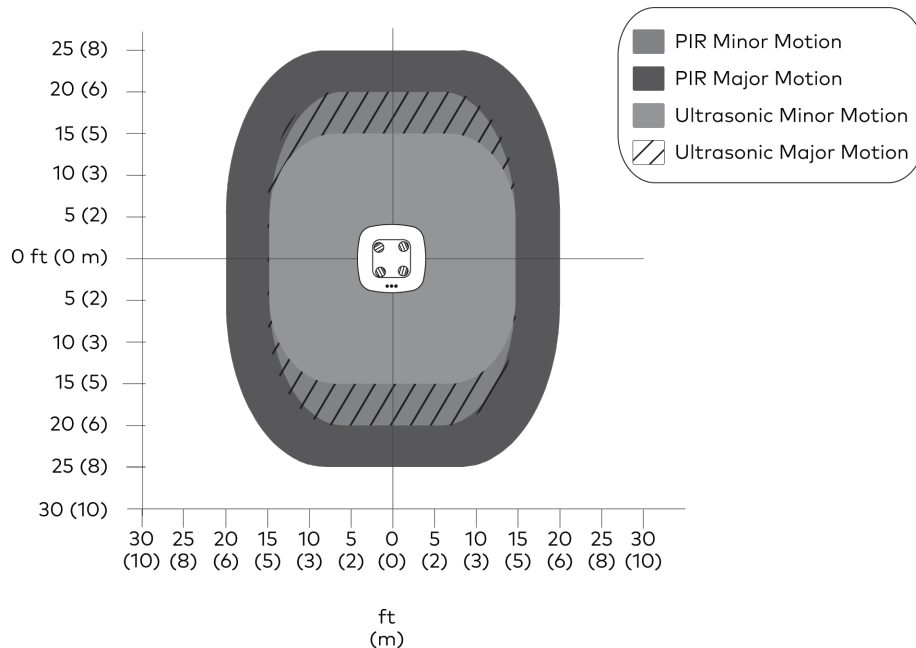

#### Side View Sensor Orientation A

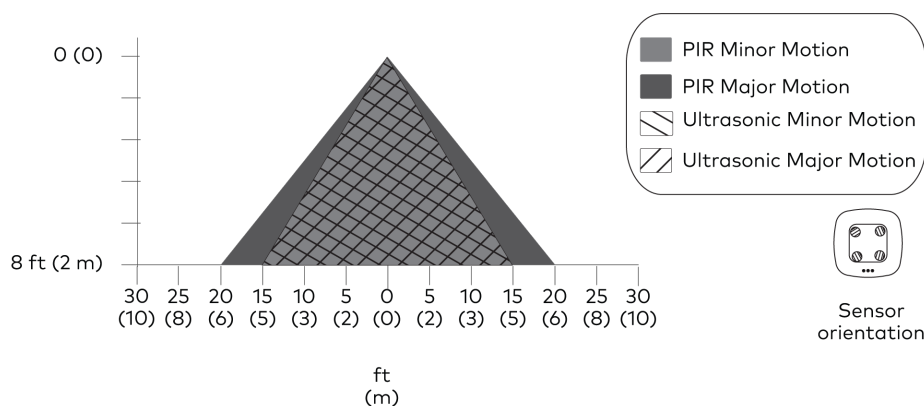

# Dual-Tech Presence Detectors with Zūm<sup>®</sup> Wired Lighting Control

Side View Sensor Orientation B

