


RAIL 1						
DIN POSITION	1	2	3	4	5	6
PRODUCT	ZUMLINK-DIN-PSU	ZUMNET-DIN-16A-LV	ZUMLINK-DIN-16A-LV	ZUMLINK-DIN-16A-LV	ZUMLINK-DIN-16A-LV	N/A
PART #	6513011	6513005	6513006	6513006	6513006	N/A
ZUM RUN	LINK 1	LINK 1, NET 1	LINK 1	LINK 1	LINK 1	
CIRCUIT #						
COMMENTS						
RAIL 2						
DIN POSITION	1	2	3	4	5	6
PRODUCT	ZUMLINK-DIN-IO	N/A	N/A	N/A	N/A	N/A
PART #	6513010	N/A	N/A	N/A	N/A	N/A
ZUM RUN	LINK 1					
CIRCUIT #						
COMMENTS						
RAIL 3						
DIN POSITION	1	2	3	4	5	6
PRODUCT	CEN-SWPOE-5AC	N/A	N/A	N/A	N/A	N/A
PART #	6512768	N/A	N/A	N/A	N/A	N/A
ZUM RUN	NET 1					
CIRCUIT #						
COMMENTS						

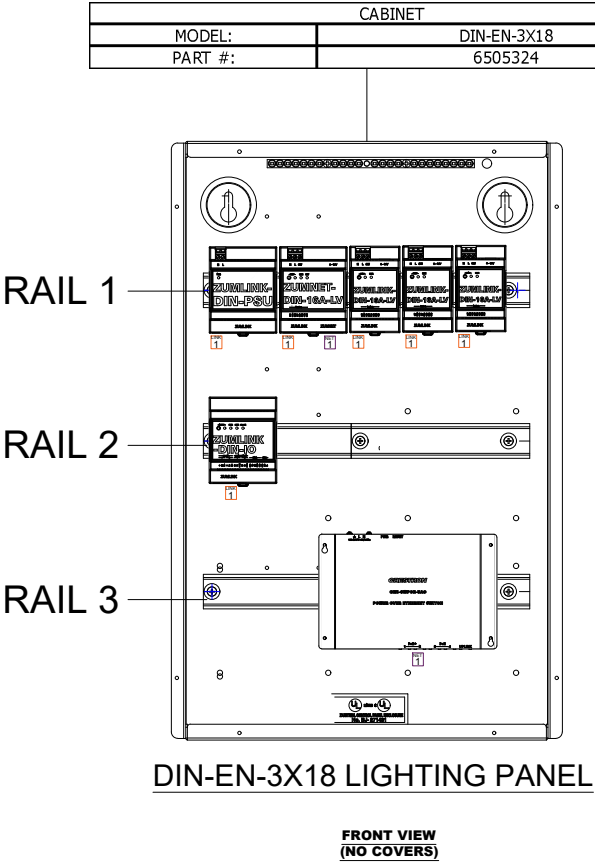

PANEL ID

ZDL03-0104TP

PANEL PICK LIST		
QUANTITY	PRODUCT	PART #
1	DIN-EN-3X18	6505324
1	ZUMLINK-DIN-PSU	6513011
1	ZUMNET-DIN-16A-LV	6513005
3	ZUMLINK-DIN-16A-LV	6513006
1	ZUMLINK-DIN-IO	6513010
1	CEN-SWPOE-5AC	6512768
	N/A	N/A
	N/A	N/A
	N/A	N/A
	N/A	N/A
	N/A	N/A
	N/A	N/A
	N/A	N/A

CRESTRON ELECTRONICS INC.			
ELECTRICAL RATINGS:			
VOLTS VAC	PHASE	FREQ Hz	FLA (TOTAL) AMP
100-277	1	50/60	5 CRT @ 16A
1	HP	LARGEST MOTOR	
SHORT CIRCUIT CURRENT			
N/A	mA RMS	240	V MAXIMUM
BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY INSTALLER SEE MODULE A MANUAL (S) FOR TERMINAL TIGHTENING TORQUE VALUES			
U/L LABEL LAYOUT			

- LINK

XX
- = ZUMLINK CABLE RUN / SPACE
- NET

XX
- = ZUMNET CABLE RUN
- SPLTR
- = ZUMLINK-SPLTR-RJ45
(USED ON ZUMLINK-DIN-PSU TO USE FULL 2K
mA DOWN SINGLE ZUMLINK LINE)

PROJECT:

LOCATION:

QUOTE #: XXXXXXXX

SO# XXXXXXXXXX

TITLE:

CUSTOM PANEL

BUILD SHEET

DRAWING:

1.0

REV: 00

DATE:

DRAWN BY: