The Crestron® AMP-X300 is a compact, versatile amplifier that can be configured for use on a flat surface or installed in a 1 RU rack space. The optional RMK-AMP-X mounting kit (sold separately) enables two amplifiers to be ganged together in a single rack space.



In the Box

1 AMP-X300, X-Series Amplifier, 300 W

Additional Items

- 4 Foot, Adhesive, Black (2055200)
- 2 Rack Ear Assembly, 1U, Quarter-width (2055197), includes Bracket, Rack Ear, 1U (2055199)
- 2 Connector, Speaker (2055206)
- 4 Connector, Input (2055207)
- 1 Connector, Remote Input (2003574)
- 1 Power cord (2055205)



Assemble

Prepare for Installation

The amplifier can be installed in a rack, mounted on a surface, or placed on a surface.


Rack Installation

Before an amplifier can be installed in a rack, rack ears must be attached.

Single Amplifier

Attach the rack ears to the amplifier with the four included 6-32 x 3/8 in. screws.

Attach Rack Ear, Single Amp

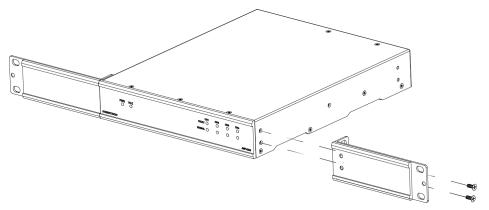




Ganged Amplifiers

NOTE: To gang multiple amplifiers, the <u>RMK-AMP-X</u> mounting kit (sold separately) is required.

Two AMP-X300 amplifiers can be ganged together while occupying only 1RU of rack space. When ganged together, the amplifier assembly occupies the entire width of the rack.


1. Place the amplifiers upside-down and adjacent to each other on a flat surface.

Position amplifiers together

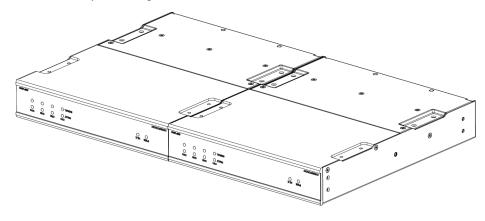


2. Use a Phillips screwdriver to gang the amplifiers together with two of the joining plates and the eight $8-32 \times 5/16$ in. screws.

Attach joining plates

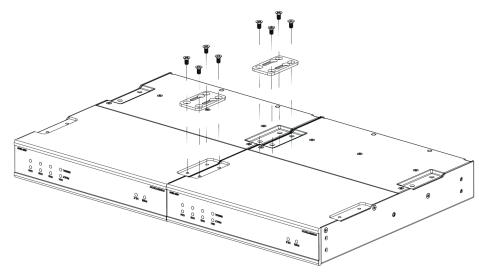


3. Use a wrench or M5.5 socket to remove the nuts from the rack ears.

Remove nuts from rack ear



4. Turn over the amplifier assembly and attach the rack ears to each side of each amplifier with six 6-32 x 3/8 in. screws.

Attach Rack Ear, Double Amp

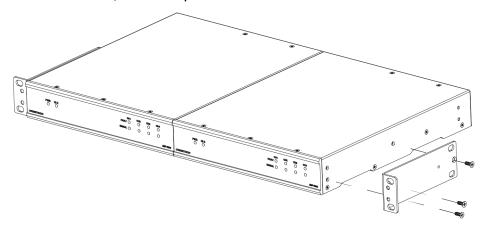


Surface Mount

NOTE: To surface mount the amplifier, the <u>RMK-AMP-X</u> mounting kit (sold separately) is required.

Use eight $8-32 \times 5/16$ in. screws to attach four joining plates to the amplifier.

Attach joining plates





Install

Once assembled, the amplifier can be mounted into a rack, mounted onto a flat surface, or placed onto a flat surface.

WARNING: To prevent bodily injury when mounting or servicing the unit in a rack:

- When mounting the unit into a partially filled rack, load the rack from the bottom to the top with the heaviest component at the bottom of the rack.
- If the rack is provided with stabilizing devices, install the stabilizers before mounting or servicing the unit in the rack.

NOTES: Observe the following rack mount installation guidelines:

- Elevated Operating Ambient Temperature: If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient temperature. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (Tma) specified by the manufacturer.
- Reduced Airflow: Installation of the equipment in a rack should be such that the amount of airflow required for safe operation of the equipment is not compromised.
- Mechanical Loading: Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.



- Circuit Overloading: Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.
- Reliable Earthing: Reliable earthing of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g., use of power strips).


Mount into a Rack

With the rack ears attached, the amplifier occupies 1 RU of rack space. Mount the amplifier into the rack using four mounting screws (not included).

Mount on a Flat Surface

Using #8, flat head screws and surface-appropriate anchors (not included), secure the amplifier to a mounting surface.

Mount on a flat surface

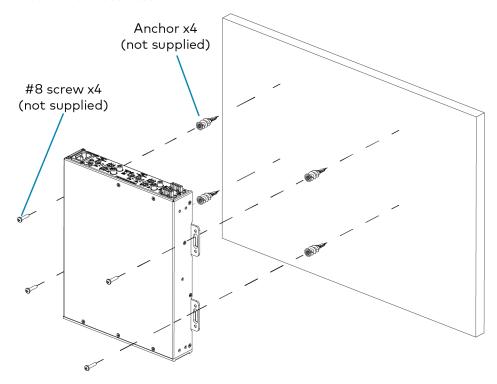

Place on a Flat Surface

Place the amplifier on a flat surface.

X-Series Amplifier, 300 W



Connect

Make the necessary connections as called out in the following diagrams. Connect power last.

CAUTION:


- Keep the device unplugged until all of the input and speaker wiring is complete.
- Check the speaker wires for shorts and frayed wiring around the speaker output connectors.

NOTES:

- Ensure that the unit is properly grounded by connecting the chassis ground lug to an earth ground (building steel).
- To prevent overheating, do not operate the amplifier in conditions beyond the environmental temperature range listed in the product specifications.



X-Series Amplifier, 300 W

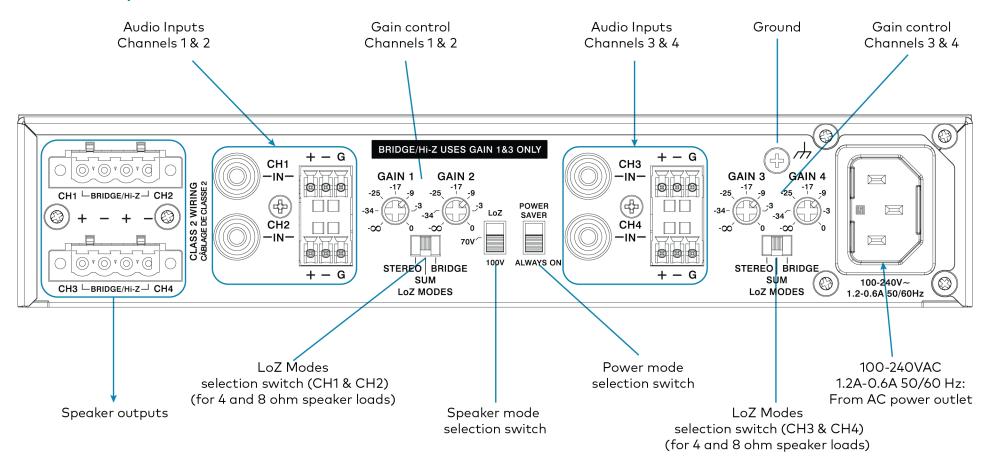

AMP-X300

X-Series Amplifier, 300 W

Speaker Mode Selection Switch

The AMP-X300 can be configured to work with 4 Ω and 8 Ω (low impedance and/or LoZ) loads or a distributed audio (high impedance and/or Hi-Z) 70/100V system.

- **LoZ**: Set the switch to **LoZ** to use the amplifier with a 4 Ω or 8 Ω low impedance loudspeaker.
- **70V**: Set the switch to **70V** to use the amplifier in a 70V distributed audio system.
- 100V: Set the switch to 100V to use the amplifier in a 100V distributed audio system.

LoZ Modes Selection Switch

When operating in LoZ mode, the AMP-X300 outputs can operate in stereo, as summed outputs or bridged outputs. Set the LoZ Modes selection switch to the desired setting and connect the outputs as required.

- STEREO: When set to STEREO, the input signals received on inputs CH1, CH2, CH3, and CH4 are sent to their respective outputs. Gain controls 1, 2, 3, and 4 are all independently adjustable, respective to the output channel.
- SUM: When set to SUM, input signals sent to CH1 IN and CH2 INare summed and sent to outputs CH1 and CH2, and input signals sent to CH3 IN and CH4 IN are summed and sent to outputs CH3 and CH4. Gain controls 1, 2, 3, and 4 are all independently adjustable, respective to the output channel.
- BRIDGE: When set to BRIDGE, an input signal sent to CH1 IN is sent out to the bridged CH1 and CH2 outputs for high-power applications. An input signal sent to CH3 IN is sent out to the bridged CH3 and CH4 outputs for high-power applications. Gain control 1 adjusts the signal sent to the bridged CH1 and CH2 outputs while Gain control 3 adjusts the signal sent to the bridged CH1 and CH2 outputs.


NOTE: When set to **BRIDGE**, **CH1 IN** and **CH2 IN** are summed together. **CH3 IN** and **CH4 IN** are also summed together and gain controls 2 and 4 are disabled.

X-Series Amplifier, 300 W

Input Wiring


Balanced and Unbalanced Audio

The AMP-X300 can receive either balanced or unbalanced audio through the input terminal block connectors. Refer to the following diagrams when wiring the terminal block connectors.



Mono and Stereo Input

The AMP-X300 can be wired for mono or stereo inputs. Refer to the following diagrams when connecting audio sources.




NOTE: RCA and terminal block inputs with the same channel number are summed.




Signal Flow Diagrams

Refer to the following diagrams for the signal flow in the available stereo, summed, bridged, and Hi-Z modes.

Stereo and Sum Modes Signal Flow

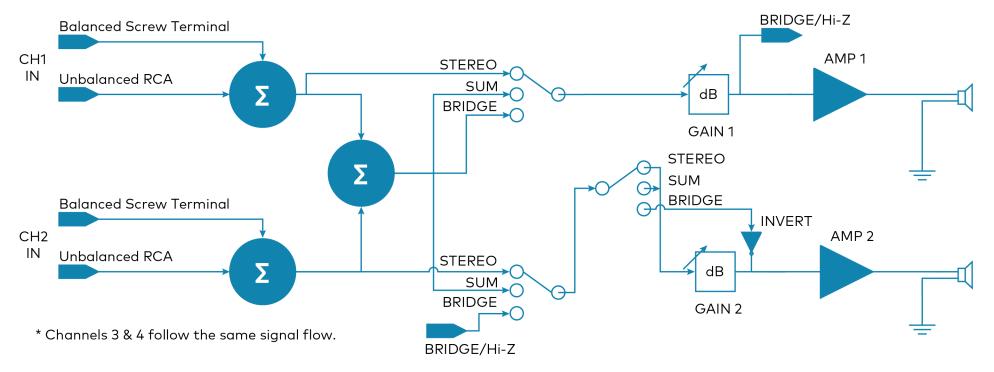

Bridge and Hi-Z Modes Signal Flow

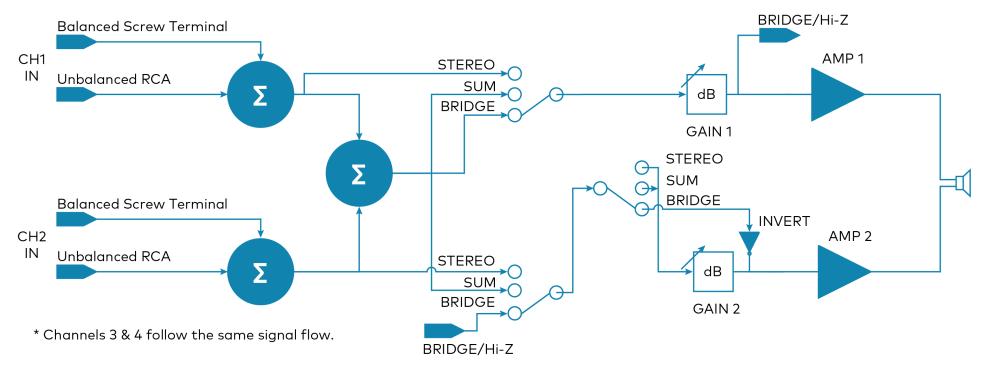




X-Series Amplifier, 300 W

Output Wiring Options


The AMP-X300 can be configured for low impedance (LoZ) stereo operation over two or four channels and high impedance (70V or 100V) operation over two channels. Refer to the following diagrams for details.




4 Channel x 75 W Stereo Output (Low Impedance)

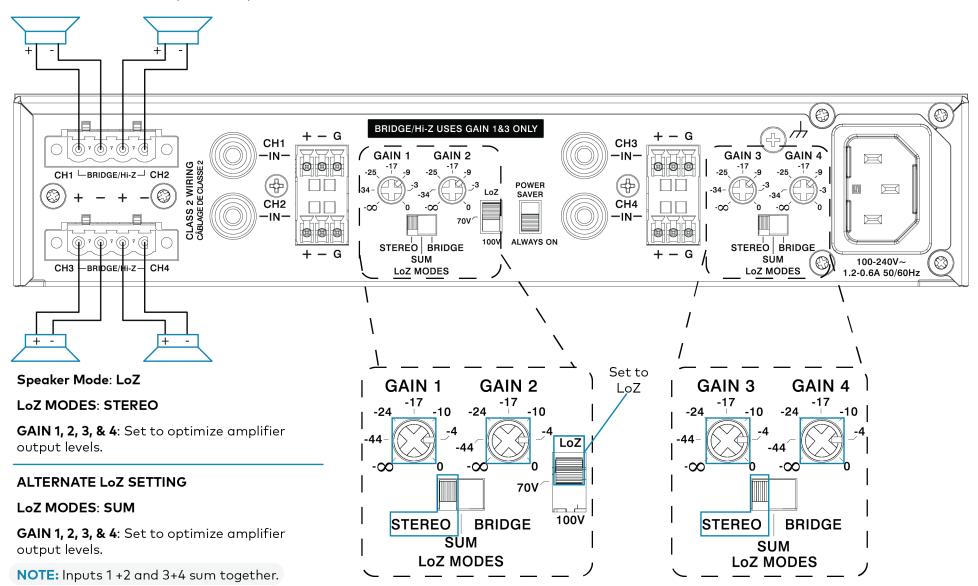

2 Channel x 150 W Bridged Stereo Output (Low Impedance)

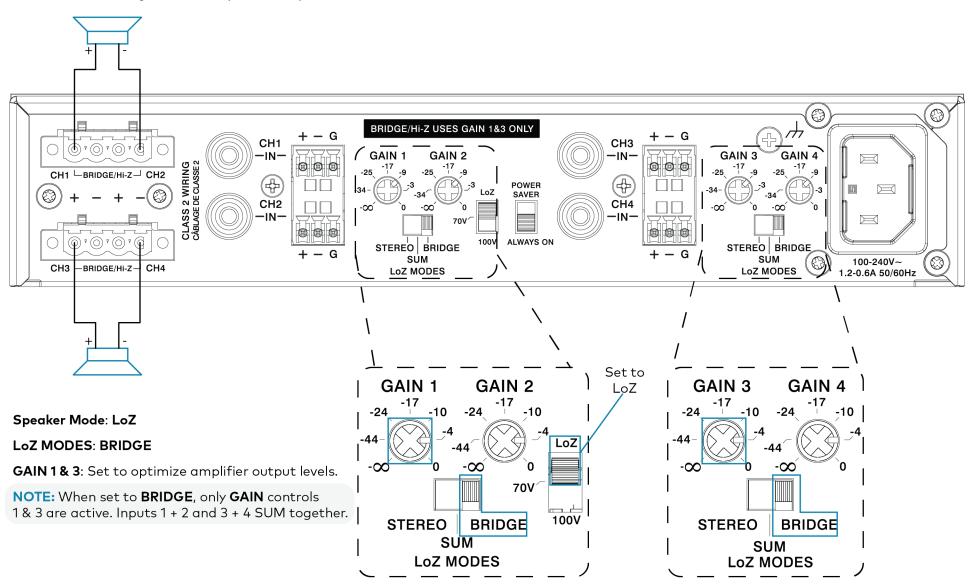

2 Channel x 150 W Bridged Output (High Impedance)

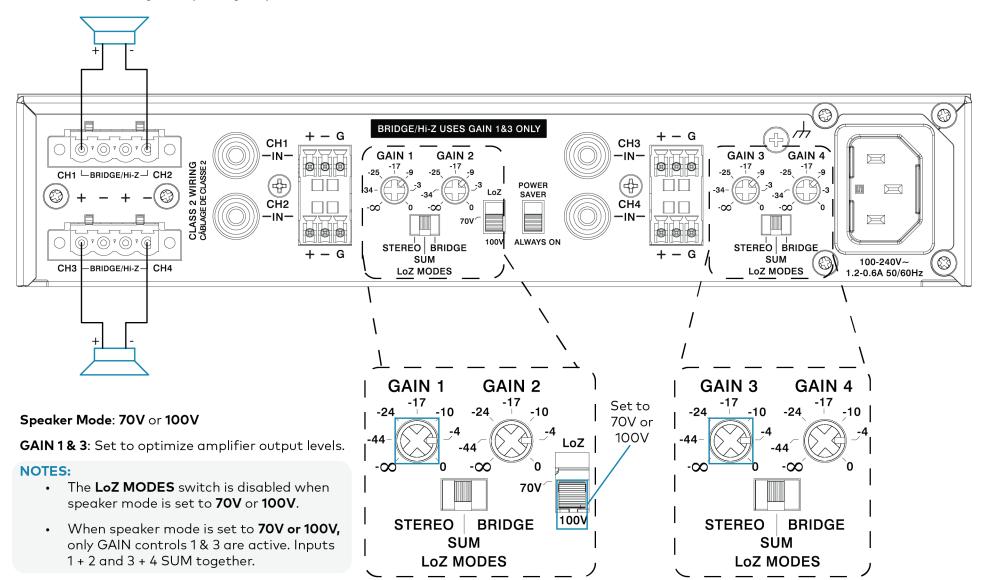

AMP-X300

Quick Start

X-Series Amplifier, 300 W



Operation

Configuration

Each amplifier channel has its own gain control on the rear of the amplifier that can be adjusted to balance the sound between channels or to accommodate different audio sources.

To configure a channel, send a test signal to the amplifier while a using a Phillips screwdriver to adjust the amplifier's gain control (turn the gain control knob clockwise to increase the gain or counterclockwise to reduce the gain).

WARNING: This amplifier is capable of delivering high power to the loudspeakers. Please use caution and adequate ear protection if listening to content at high volume levels, as continued exposure to high sound pressure levels can cause permanent hearing impairment or loss.

- 1. Set the source's output signal level to maximum.
- 2. Set the amplifier's gain to the lowest setting (full counterclockwise).
- 3. Apply power to the amplifier.
- 4. Increase the amplifier's gain control until the desired volume level is reached in the audio playback zone.

NOTE: If clipping is exhibited in the playback audio, check the gain levels at the amplifier first. If the clipping is not remedied by adjusting the gain at the amplifier, troubleshoot the other gain stages earlier in the signal chain.



Observe the LED Indicators

The LEDs on the front panel provide the following information:

LED	Description
PWR	White: The amplifier is operating normally.
	Red: The amplifier has entered Standby (Power Saver) mode.
FAULT	Red: There is a fault, clip, or limiting on the indicated channel.
SIGNAL	White: An audio signal is present on the indicated channel.



AMP-X300



X-Series Amplifier, 300 W



Visit the Product Page

Scan the QR code to visit the product page.

AMP-X300



www.crestron.com/model/6510866



Additional Information

Original Instructions

The U.S. English version of this document is the original instructions. All other languages are a translation of the original instructions.

Crestron product development software is licensed to Crestron dealers and Crestron Service Providers (CSPs) under a limited nonexclusive, nontransferable Software Development Tools License Agreement. Crestron product operating system software is licensed to Crestron dealers, CSPs, and end-users under a separate End-User License Agreement. Both of these Agreements can be found on the Crestron website at www.crestron.com/legal/software_license_agreement.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, visit www.crestron.com/opensource.

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

©2025 Crestron Electronics, Inc.

Doc ID 8512D (2054353)

05/22/25

