

HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications



White Shown with Custom Engraving on a Style 1 Button Assembly, Faceplate Included with Standard Model

- 1-gang EU/UK-style electrical box installation using the included metal backplate (-GLASS models require [HZ2-KPCN-WMKT-EU/UK-10](#), sold separately)
- Horizon® 2 faceplate (1-gang model [HZ2-FP-G](#) series) included with standard models (not included with -GLASS models)
- Multigang installation using Horizon® 2 multi-gang faceplates ([HZ2-FP-G](#) series, sold separately)
- Preinstalled 5 single button assembly (Style 1) with default engraving or can be configured with six different button assemblies with custom engraving
- Multicolor RGB LEDs provide backlighting for engraved buttons
- White LED backlighting is available and can be dynamically set anywhere between 2000K and 8000K
- Replacement button assemblies available in six styles to accommodate changes in device function or engravings
- Standard blank button assemblies available for engraving by a third-party
- Ambient light sensor for auto-dimming with separate day and night backlight modes
- Fully programmable via a Crestron control system
- Crestron Home® OS compatible
- Dual Cresnet® ports for easy daisy-chaining
- Two control input ports for external sensors
- Available in white, black, almond, white glass, and black glass
- Optionally mix standard and glass finishes

The [HZ2-KPCN](#) Horizon® 2 keypad provides Cresnet® network control of lighting, shading, audio, and other amenities. Its design matches the entire line of Horizon dimmers, switches, and keypads, making it a great addition to new or retrofit installations.

The HZ2-KPCN is available with default engraving on a five push button assembly (Style 1) or custom engraving on any style button assembly.

- Default engraving on a five pushbutton button assembly (Style 1) is provided with the HZ2-KPCN-A, HZ2-KPCN-W, HZ2-KPCN-B, HZ2-KPCN-GLASS-W, and HZ2-KPCN-GLASS-B. The default engraving includes a simple dot to provide visual feedback and indicate where the button can be pressed.



HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

- Custom engraving on any style button assembly is provided with the HZ2-KPCN-A ENGRAVED, HZ2-KPCN-W ENGRAVED, HZ2-KPCN-B ENGRAVED, HZ2-KPCN-GLASS-W ENGRAVED, and HZ2-KPCN-GLASS-B ENGRAVED. The custom engraved button assembly is installed prior to shipment.



Integrated Keypad

Supporting up to five buttons in six available button configurations, the HZ2-KPCN is configurable for a variety of applications. When connected to the Crestron network, the keypad can trigger remote actions.

Button Engraving

Functions of each button on the button assembly can be identified with custom, laser-etched engraving. Engraved buttons can be illuminated using the device's LED backlights. Engraving is included with ENGRAVED models. Standard button assemblies without engraving (BLANK models) are also available and can be used as is or can be custom engraved by a third-party engraver.

NOTE: Glass Horizon 2 buttons can only be engraved by Crestron and are not offered blank.

When a custom engraved model is ordered, the engraved button assembly is installed on the device before it is shipped. Engraving files must be provided at time of order and can be created using [Impress Custom Engraving Software](#), the Crestron Home® Setup app, the Crestron Home Online Configurator, or D3Pro® software. If necessary, custom engraving can be changed until the order is processed by emailing orders@crestron.com with the updated engraving file and order information.

To order replacement engravings, refer to the [HZ2-BTNS ENGRAVED](#) button assembly product page.

Multicolor Backlit Buttons

The engraved buttons are illuminated using the device's RGB LED backlights. Each button can be assigned custom color backlighting. The LED backlight provides feedback by changing the intensity, changing the color, or flashing to show that an action is being performed. Backlighting colors can be adjusted using Crestron Home software or other Crestron programming tools.

Local color theme sets the colors for all buttons on the device. In addition to the local color theme, each button can be assigned an alternate color theme. Thirteen local color themes are available that include Tunable White (default is Warm White), Neutral White, Cool White, and a variety of common colors. The local color theme and alternate color themes can be changed programmatically.

Field-Replaceable Button Assemblies

Field-replaceable button assemblies allow for changes in device function or for the customer to use the system before finalizing the engravings. The button assembly can be replaced with any custom engraved or blank [HZ2-BTNS](#) button assembly. All Horizon 2 devices can use standard buttons, glass buttons, or a mix.

HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

The HZ2-KPCN devices are available in White (-W), Black (-B), Almond (-A), White Glass (-GLASS-W), and Black Glass (-GLASS-B) in the following styles:

- **Style 1:** 5 single buttons
HZ2-BTNS-1 ENGRAVED



HZ2-BTNS-1 BLANK



HZ2-BTNS-1-GLASS ENGRAVED



- **Style 2:** 4 single buttons and 1 split rocker button;
Split rocker button is located in the lowest button position

NOTE: The split rocker button does not allow for a center push and shares one backlight for the entire split rocker.

HZ2-BTNS-2 ENGRAVED



HZ2-BTNS-2 BLANK



HZ2-BTNS-2-GLASS ENGRAVED



HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

- **Style 3:** 4 single buttons and 1 split rocker button;
Split rocker button is located in the second lowest button position

NOTE: The split rocker button does not allow for a center push and shares one backlight for the entire split rocker.

HZ2-BTNS-3 ENGRAVED



HZ2-BTNS-3 BLANK



HZ2-BTNS-3-GLASS ENGRAVED



- **Style 4:** 3 single buttons and 2 split rocker buttons;
Split rocker buttons are located in the two lowest button positions

NOTE: The split rocker buttons do not allow for a center push and each split rocker shares one backlight for the entire split rocker.

HZ2-BTNS-4 ENGRAVED



HZ2-BTNS-4 BLANK



HZ2-BTNS-4-GLASS ENGRAVED



HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

- **Style 5:** 1 medium rocker button and 2 single buttons; Single buttons are located in the two lowest button positions

NOTE: The medium rocker button does not allow for a center push and provides a separate backlight for the top, bottom, and center positions.

HZ2-BTNS-5 ENGRAVED



HZ2-BTNS-5 BLANK



HZ2-BTNS-5-GLASS ENGRAVED



- **Style 6:** 1 large rocker button

NOTE: The large rocker button does not allow for a center push and provides a separate backlight for the top, bottom, and center positions.

HZ2-BTNS-6 ENGRAVED



HZ2-BTNS-6 BLANK



HZ2-BTNS-6-GLASS ENGRAVED




HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

Multigang Expansion with Horizon 2 Faceplates

Install up to four Horizon® 2 devices side-by-side in a US multigang electrical box with a compatible [HZ2-FP-G](#) series faceplate. When multiple devices are installed in a 2-, 3-, or 4-gang faceplate, the buttons on the devices are aligned to form one continuous control surface.

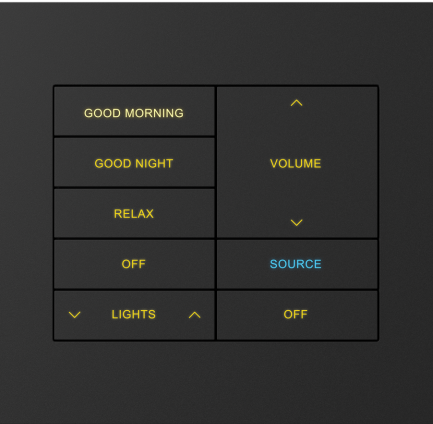

Ambient Light Sensor

To ensure optimal visibility under varying lighting conditions, the button backlighting and indicator intensity adjusts automatically according to the amount of ambient light in the room.

Built-In Control Ports

Two digital/analog input ports are included on the keypad to provide a local interface for Crestron occupancy sensors, daylight sensors, and other devices that provide a contact closure, DC logic, or 0–10VDC. Using the control ports, it is possible to add room occupancy, ambient light level, door closures, and other conditional monitoring without additional wiring.

Standard Wall Mount

Horizon keypads are designed for installation in a standard electrical wall box, making them perfect for installation in a multi-gang box alongside other Horizon devices. Installation of -GLASS models in an EU/UK-style back box requires the [HZ2-KPCN-WMKT-EU/UK-10](#) wall mount kit (sold separately).

Cresnet® Wired Communications

The keypad communicates with a Crestron control system via Cresnet, a 4-wire network bus that provides bidirectional data communication and 24VDC power to each keypad in the system. To simplify wiring in a multigang arrangement, the keypad includes dual parallel Cresnet ports for daisy-chaining.

Specifications

Power Requirements

Cresnet Power Usage 2 W (83 mA @ 24VDC)

Controls

Push button	(9) Push buttons, located under the button assembly; Push buttons are actuated by the button assembly that is installed
Button Assembly	(1) Button assembly included; Default engraving: Includes default engraving on a Style 1 button assembly; Custom engraving (ENGRAVED models): Includes custom engraving on any style button assembly; Compatible with Style 1–6 button assemblies
Setup	(1) Push button; Front of the faceplate must be removed to access the push button; Can be used to set the local LED backlight color theme or calibrate the ambient light sensor

LED Indicator and Light Sensor

LED Feedback	(5) RGB LED backlights; Supports one local color theme for all LEDs; Supports one alternate color theme for each backlit position
Light Sensor	(1) Photosensor with adjustable sensitivity; Detects the ambient room light level to activate day or night mode and autodimming the backlight

NOTE: Light sensor performance may be affected by obstructions placed below the keypad.

Communications

Cresnet Cresnet client mode

Connections

INPUT (12 G)	(1) 3-pin 3.5 mm detachable terminal block; (2) digital/analog input ports, (1) ground; Digital Input: Rated for 0–24VDC, input impedance 200k Ω , logic threshold 1.24VDC; Analog Input: Rated for 0–10VDC, protected to 24VDC maximum, input impedance 200k Ω ; Programmable 3V, 2k Ω pull-up resistor per input
---------------------	---

HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

NET
(24 Y Z G) (2) 4-pin 3.5 mm detachable terminal blocks, paralleled;
Cresnet secondary port with hardwire parallel pass-through

Environmental

Temperature 32° to 86°F (0° to 30°C)
Humidity 10% to 90% RH (noncondensing)

Construction

Mounting Mounts in a 1- to 4-gang U.S. or 1-gang EU style electrical box (not included);
Note: -GLASS models require HZ2-KPCN-WMKT-EU/UK-10 (sold separately) for mounting in EU style electrical boxes;
3.5 in. (26 mm) electrical box depth recommended

Faceplate Horizon® 2 faceplate required for installation;
1-gang faceplate ([HZ-FP-G](#)) with one-piece metal backplate is included with standard models
Multigang installations require a 2-, 3-, or 4-gang Horizon® 2 faceplate with metal backplate ([HZ-FP-G](#), sold separately);
The metal backplate is required for all installations where the electrical box is flush with or recessed from the wall surface and during installation into a 1-gang EU style electrical box;
The metal backplate is not recommended for electrical boxes that protrude beyond the wall surface

Dimensions

Height 4.13 in. (105 mm) without faceplate
Width 1.80 in. (46 mm)
Depth (Standard) 0.64 in. (17 mm) overall, projects 0.44 in. (12 mm) from wall surface when installed
Depth (Glass) 0.71 in. (18 mm) overall, projects 0.46 in. (12 mm) from wall surface when installed

NOTE: Dimensions shown are without the detachable connectors.

Weight

4.8 oz (135 g)

Compliance

IC, FCC Part 15 Class B digital device

Regulatory Model: M201849007

Models

HZ2-KPCN-A ENGRAVED

Horizon® 2 Keypad with Cresnet® Communications, Custom Engraved, Almond

HZ2-KPCN-B ENGRAVED

Horizon® 2 Keypad with Cresnet® Communications, Custom Engraved, Black

HZ2-KPCN-GLASS-B ENGRAVED

Horizon® 2 Keypad with Cresnet® Communications, Custom Engraved, Black Glass

HZ2-KPCN-W ENGRAVED

Horizon® 2 Keypad with Cresnet® Communications, Custom Engraved, White

HZ2-KPCN-GLASS-W ENGRAVED

Horizon® 2 Keypad with Cresnet® Communications, Custom Engraved, White Glass

HZ2-KPCN-A

Horizon® 2 Keypad with Cresnet® Communications, Standard Engraved, Almond

HZ2-KPCN-B

Horizon® 2 Keypad with Cresnet® Communications, Standard Engraved, Black

HZ2-KPCN-GLASS-B

Horizon® 2 Keypad with Cresnet® Communications, Standard Engraved, Black Glass

HZ2-KPCN-W

Horizon® 2 Keypad with Cresnet® Communications, Standard Engraved, White

HZ2-KPCN-GLASS-W

Horizon® 2 Keypad with Cresnet® Communications, Standard Engraved, White Glass

Available Accessories

For a list of available accessories, visit the [HZ2-KPCN](#) product page.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or contact us for additional information by visiting www.crestron.com/contact/our-locations for your local contact.

The original language version of this document is U.S. English. All other languages are a translation of the original document.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, Crestron Home, Cresnet, and Horizon are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United

HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.


©2024 Crestron Electronics, Inc.

Rev 10/24/24

HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

HZ2-KPCN

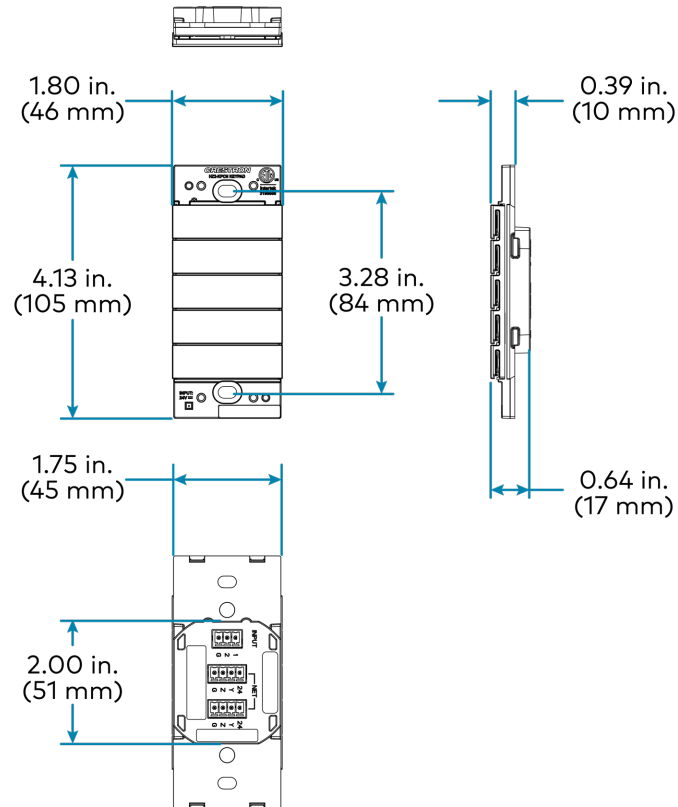

HZ2-KPCN

Horizon® 2 Keypad with Cresnet® Communications

HZ2-KPCN-GLASS

